


REEL STANDS

Model RS-8-72x44
with 16" Diameter Bronze Disc Brake



Model RS-15-96x62
with 24" Diameter Bronze Disc Brake shown with Optional Hand / Hydraulic Brake Controller and Optional Hydraulic Rewind

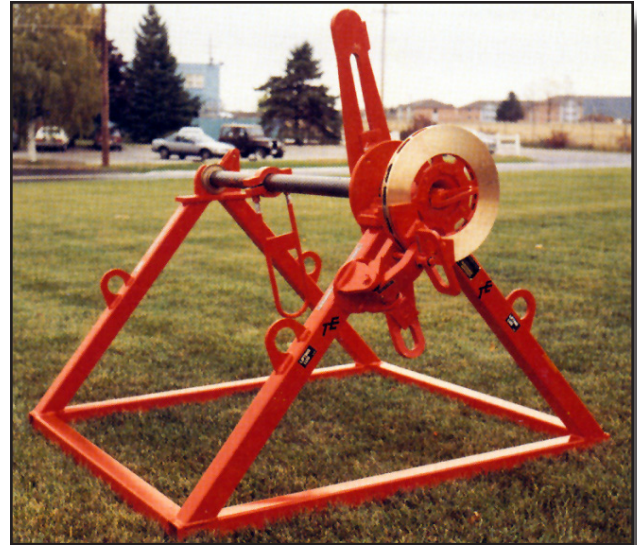

Optional Hand / Hydraulic Brake Controller



REEL STAND FEATURES:

- TSE / Timberland exclusive Quick Change Reel Shaft System with Straight Vertical Lift
- Non-Corrosive Bronze Disc Reel Shaft Brake

**OUR PEOPLE CARE ...
OUR EQUIPMENT IS THE PROOF**

TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE

REEL STANDS

MODEL	RS-8 72 x 44	RS-12 96 x 56	RS-15 96 x 62	RS-20 96x62
REEL CAPACITY				
Maximum Diameter	1830 mm (72")	2438 mm (96")	2440 mm (96")	2440 mm (96")
Maximum Width	1120 mm (44")	1422 mm (56")	1574 mm (62")	1576 mm (62")
Maximum Weight	3628 kg (8000 lbs)	5443 kg (12000 lbs)	6804 kg (15000 lbs)	9072 kg (20000 lbs)
UNIT DIMENSIONS				
Reel Shaft Diameter	66 mm / (2 5/8")	66 mm / (2 5/8")	89 mm / (3 1/2")	127 mm / (5")
Bronze Disc Brake	406 mm / (16")	406 mm / (16")	610 mm / (24")	914 mm / (36")
Length	1630 mm / (5'4")	2240 mm / (7'4")	2290 mm / (7'6")	2340 mm / (7'8")
Width	1930 mm / (6'4")	2540 mm / (8'4")	2590 mm / (8'6")	2690 mm / (8'10")

GENERAL FEATURES

- Manual brake caliper
- Quick change reel shaft removal with straight vertical lift
- Bronze bushings on reel shaft
- Double pin drive arm
- Locking collar with lifting loop
- 4 lifting lugs welded to the frame
- Unit is sandblasted, primed and painted with 2 coats of yellow acrylic enamel


OPTIONS

- Hydraulic brake caliper in lieu of manual brake caliper
- Larger diameter disc brakes
- Manual reel shaft rewind
- Hydraulic reel shaft rewind with free wheeling disconnect

Note:

Reel stands with capacities and dimensions other than those listed are available.

QUICK-CHANGE REEL SHAFT REMOVAL SYSTEM

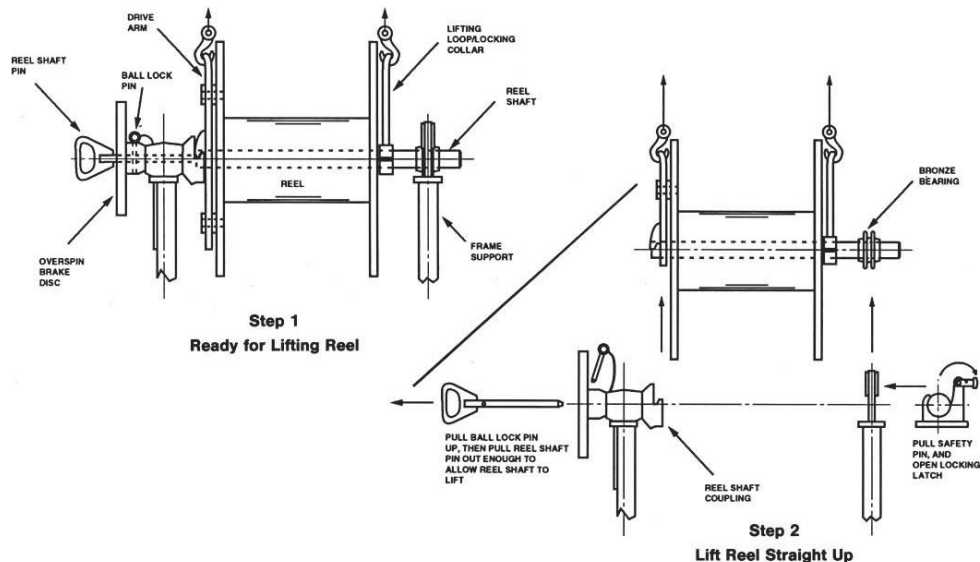

**OUR PEOPLE CARE ...
OUR EQUIPMENT IS THE PROOF**

TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE