


CONVERTIBLE STRINGING BLOCKS

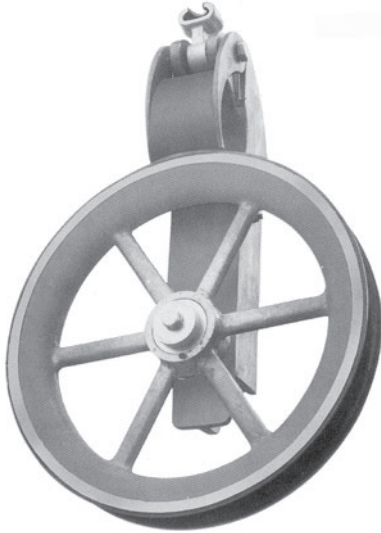

Model 5716-1

SPECIFICATIONS


Stringing block for single conductor
 Aluminum alloy sheave and frame
 Standard 'B' socket suspension
 Rugged, lightweight construction
 Assembled weight 12 kg (26.5 lbs)

SHEAVE DIMENSIONS

Outside diameter	406 mm (16")
Groove diameter	346 mm (13.6")
Groove radius (lined)	15 mm (.60")

SHEAVE OPTIONS

Abrasion resistant urethane linings

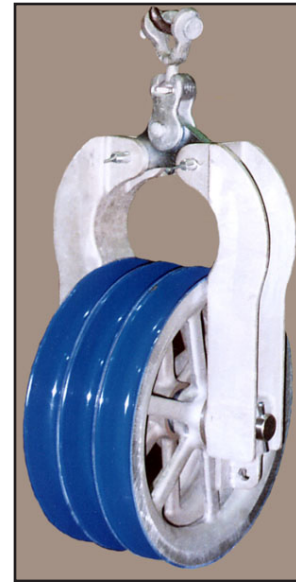

Model 5716-3

SPECIFICATIONS

Stringing block for three conductors
 Aluminum alloy frame and sheaves
 Special 'B' socket suspension
 Converts easily into two single blocks
 Rated working load 3200 kg (7055 lbs)
 Assembled weight 32 kg (70.5 lbs)

**OUR PEOPLE CARE ...
 OUR EQUIPMENT IS THE PROOF**

TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE