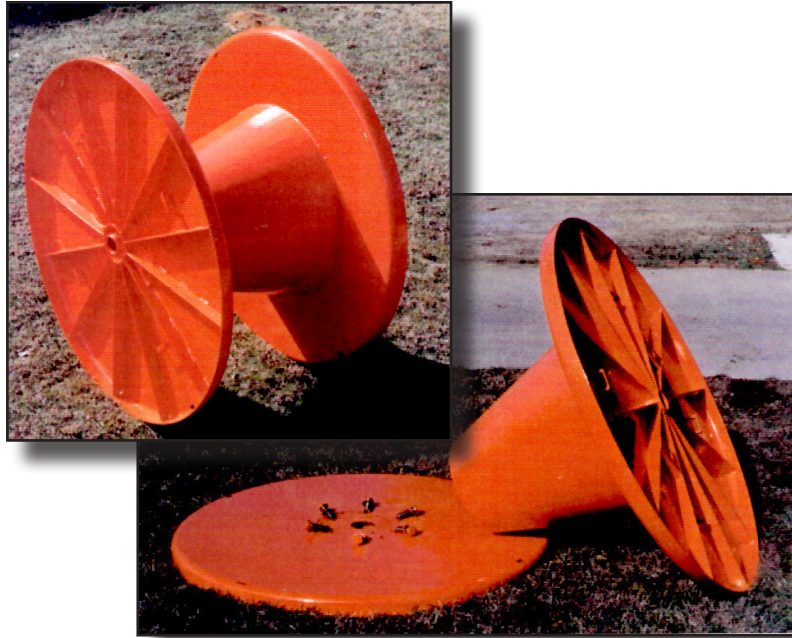


**ACCESSORIES**


Steel breakaway reels are specifically designed for winding in and banding old conductor on reconducting operations. They may be used with take-up winders or puller / tensioners and feature tapered barrels for ease of conductor removal in a compact banded coil. The unique flange lock feature provides complete flange security during pulling operations while permitting quick flange removal. Special sizes are available for special applications.

MODEL #	BRS2814	BRS6030	BRS6632	BRS7236	BRS8436
TE Part #	811964	860750	860837	861132	8600216
Outside Dia.	711 mm (28")	1524 mm (60")	1676 mm (66")	1829 mm (72")	2134 mm (84")
Outside Width	381 mm (15")	889 mm (35")	965 mm (38")	1067 mm (42")	1067 mm (42")
Width between flanges	356 mm (14")	762 mm (30")	813 mm (32")	914 mm (36")	914 mm (36")
Barrel type	split taper	tapered	tapered	tapered	tapered
Barrel dia.	406 mm (16")	635 mm (25")	813 mm (32")	813 mm (32")	864 mm (34")
Maximum Linepull	454 kg (1000 lbs)	680 kg (1500 lbs)	680 kg (1500 lbs)	680 kg (1500 lbs)	680 kg (1500 lbs)
Weight	61 kg (135 lbs)	386 kg (850 lbs)	454 kg (1000 lbs)	522 kg (1150 lbs)	612 kg (1350 lbs)

**OUR PEOPLE CARE ...  
OUR EQUIPMENT IS THE PROOF**

**TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE**