


ACCESSORIES

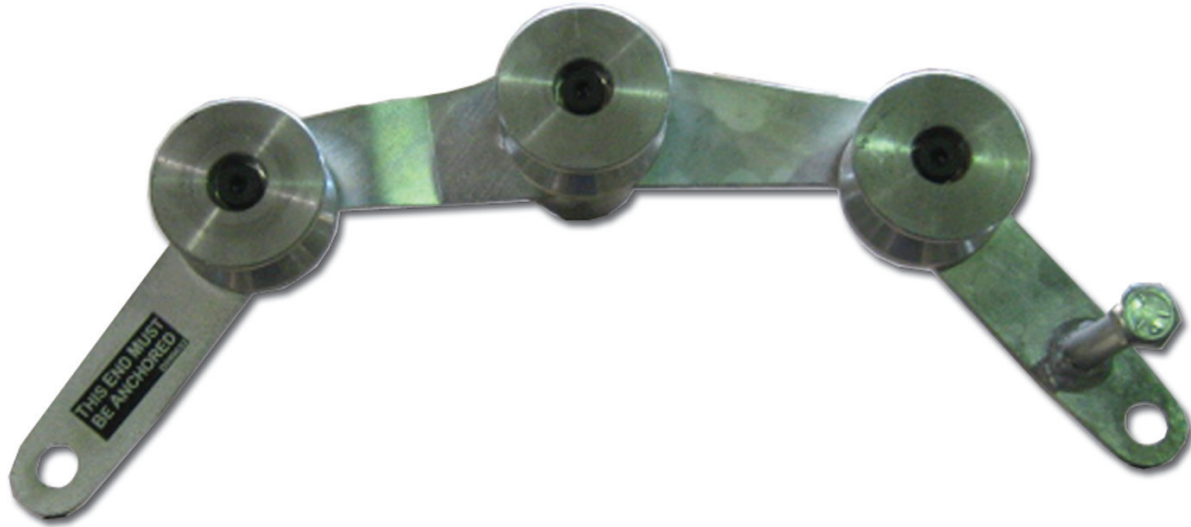

Kwikmount Running Earths are specially designed for grounding conductors and/or pulling rope in a range of diameter from 6mm (1/4”) up to 64mm (2 1/2”). They have been tested up to 20,000 amps for fault-current duration up to 25 cycles.

Installation procedure as detailed on reverse.


Model Number	TE Part Number	Roller size and type	Purpose	Weight		Diameter Range	
				kg	lbs.	mm	in.
9003-3A	810145	Aluminum 76mm (3”)	Conductor	3.2	8	6-32	1/4”- 1 1/4”
9003-3S	809634	Steel 64mm (2 1/2”)	Pulling Rope	4.0	9	6-25	1/4”- 1”
9004-3A	809635	Aluminum 89mm (3 1/2”)	Conductor	5.4	12	13-64	1/2”- 2 1/2”

**OUR PEOPLE CARE ...
OUR EQUIPMENT IS THE PROOF**

TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE

ACCESSORIES

TYPICAL KWIKMOUNT INSTALLATION

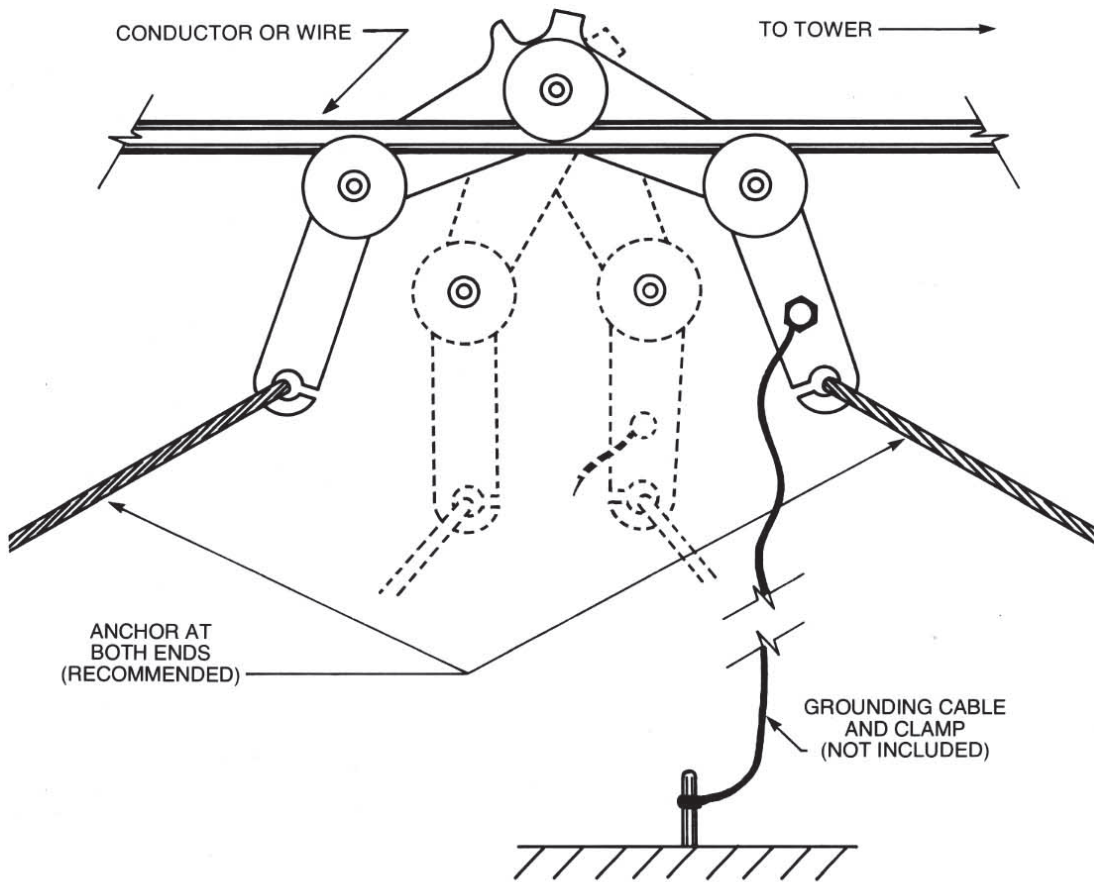

**OUR PEOPLE CARE ...
OUR EQUIPMENT IS THE PROOF**

TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE