
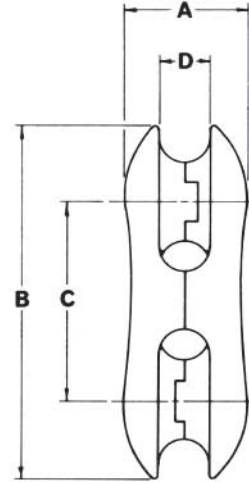


ACCESSORIES

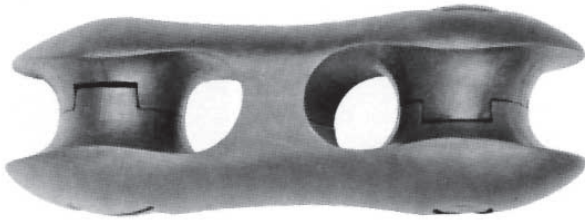

Pulling Rope Connectors are cast from high grade steel and all castings are 100% pull tested to ensure high quality. Pulling line connectors should be sized in accordance with the rated working load of the rope being used. These high strength connectors are shaped to pass around bullwheels under load.

Model	Rope Size		A		B		C		D		Working Load		Weight	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs	kg	lbs	kg
708110	1/4, 3/8	6, 10	1 13/16	30.2	3 3/4	95.3	2 1/8	54	7/16	11.1	6000	2772	.75	.34
708913	7/16	11	1 1/2	38.1	4 3/8	111.1	2 1/2	63.5	9/16	14.2	12000	5443	1	.45
709283	1/2	13	1 3/4	44.5	5 1/16	128.6	2 7/8	73	11/16	17.4	15000	6804	2	.91
708109	9/16, 5/8	14, 16	1 7/8	47.6	5 5/8	142.9	3 1/4	82.6	13/16	20.6	22000	9979	3	1.36
708228	3/4	19	2	50.8	6	152.4	3 1/2	88.9	15/16	23.8	28500	12928	4	1.81
706792	13/16, 7/8	21, 22	2 3/8	60.3	6 3/4	171.5	4	101.6	1 3/64	26.6	40000	18144	5	2.27
712231	1	25	2 5/8	66.7	7 3/4	196.8	4 3/4	120.6	1 3/16	30.2	67000	30391	6	2.72
7000314	1 3/16	30	3 1/8	80	9 1/4	236.5	5 3/4	144.8	1 5/8	41.3	80000	36287	9	4.08

**OUR PEOPLE CARE ...
OUR EQUIPMENT IS THE PROOF**

TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE