


## ACCESSORIES

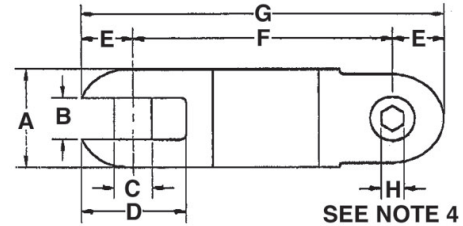

### STANDARD FEATURES

Stainless steel construction (Models SW-30 and SW-38 are black oxide finish)

Intended for connecting the pull rope to the utility product in an overhead and underground application. The swivel permits rotation of the pull rope while protecting the product from twisting

Line swivels are not designed to run around bullwheels

Slotted clevis pins are supplied standard on SW-17 to SW-13. Hex clevis pins are supplied standard on swivels SW-14 to SW-38

Model Number	TE Part Number	Safe Working Load	Ultimate Load	A	B	C	D	E	F	G	H	Net Weight
SW-7	551790	750 lb 3.3 kN	2250 lb 10 kN	5/8" 16 mm	9/32" 7.1 mm	3/16" 4.8 mm	11/16" 17.5 mm	1/4" 6.4 mm	2" 51 mm	2 1/2" 64 mm	N/A	0.13 lb 0.06 kg
SW-9	551791	2250 lb 10 kN	6750 lb 30 kN	7/8" 22 mm	3/8" 9.5 mm	5/16" 7.9 mm	31/32" 24.6 mm	7/16" 11.1 mm	2 1/2" 64 mm	3 3/8" 86 mm	7/32"	0.33 lb 0.15 kg
SW-10	551792	3500 lb 16 kN	10500 lb 47 kN	1" 25 mm	13/32" 10.3 mm	3/8" 9.5 mm	1 3/32" 27.8 mm	1/2" 12.7 mm	2 7/8" 73 mm	3 7/8" 98 mm	1/4"	0.50 lb 0.23 kg
SW-13	551793	5000 lb 22 kN	15000 lb 67 kN	1 1/4" 32 mm	17/32" 13.5 mm	13/32" 10.3 mm	1 9/32" 27.8 mm	17/32" 13.5 mm	3 11/16" 94 mm	4 3/4" 121 mm	1/4"	1.0 lb 0.45 kg
SW-14	551794	7000 lb 31 kN	21000 lb 93 kN	1 3/8" 35 mm	9/16" 14.3 mm	1/2" 12.7 mm	1 3/8" 35.0 mm	5/8" 15.9 mm	3 7/8" 98 mm	5 1/8" 130 mm	5/16"	1.4 lb 0.63 kg
SW-15	551795	9000 lb 40 kN	27000 lb 120 kN	1 1/2" 38 mm	19/32" 15.1 mm	1/2" 12.7 mm	1 9/16" 39.6 mm	11/16" 17.5 mm	4 1/4" 108 mm	5 5/8" 143 mm	5/16"	1.7 lb 0.77 kg
SW-17	551796	10000 lb 45 kN	30000 lb 130 kN	1 5/8" 41 mm	11/16" 17.5 mm	5/8" 15.9 mm	1 23/32" 43.7 mm	3/4" 19.1 mm	4 1/2" 114 mm	6" 152 mm	3/8"	2.1 lb 0.95 kg
SW-19	551797	15000 lb 67 kN	45000 lb 200 kN	2" 51 mm	25/32" 19.8 mm	11/16" 17.5 mm	2 1/16" 52.4 mm	15/16" 23.8 mm	5 1/8" 130 mm	7" 178 mm	7/16"	3.8 lb 1.7 kg
SW-26	551798	30000 lb 133 kN	90000 lb 400 kN	2 3/8" 60 mm	1 1/32" 26.2 mm	7/8" 22.2 mm	2 25/32" 70.6 mm	1 3/16" 30.2 mm	7 5/8" 194 mm	10" 254 mm	7/16"	7.6 lb 3.5 kg
SW-30	551799	50000 lb 222 kN	150000 lb 667 kN	3" 76 mm	1 3/16" 30.2 mm	1 1/8" 28.6 mm	3 5/8" 92.1 mm	1 1/2" 38.1 mm	10" 254 mm	13" 330 mm	7/16"	20 lb 9.1 kg
SW-38		62500 lb 278 kN	187500 lb 834 kN	3 3/4" 95 mm	1 1/2" 38.1 mm	1 1/4" 31.7 mm	4 1/4" 107.9 mm	1 7/8" 47.6 mm	12 1/8" 308 mm	15 7/8" 403 mm	1/2"	34 lb 15.4 kg

The Safe Working Load is calculated using a 3:1 safety factor based on the ultimate load. The Ultimate Load is the tensile load required to separate the line swivel into two or more parts.

**OUR PEOPLE CARE ...  
OUR EQUIPMENT IS THE PROOF**

## TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE