


ACCESSORIES

STANDARD FEATURES

- Constructed of high tenacity polyester fiber with helically wrapped polyester tape and covered with a jacket of polyester
- Urethane coated outer jacket for improved abrasion resistance, UV maintenance and water resistance
- Very low elongation
- Very high strength
- Abrasion and snag resistant
- Excellent wet / dry strength retention
- Torque-free, non-hockling
- Renders well on blocks

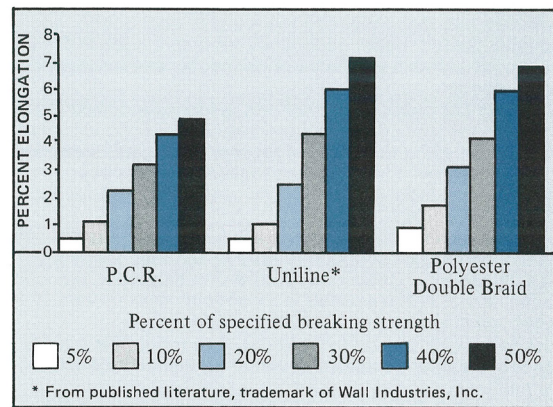

Rope Diameter		Average Tensile Strength		Weight	
				Per ft	Per m
in.	mm	lbs	kg	lbs	kg
1/2	12	11000	4990	0.079	0.118
5/8	16	17000	7711	0.136	0.202
3/4	18	24200	10997	0.196	0.292
7/8	22	33000	14969	0.267	0.397
1	24	42500	19278	0.350	0.521

**OUR PEOPLE CARE ...
OUR EQUIPMENT IS THE PROOF**

TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE