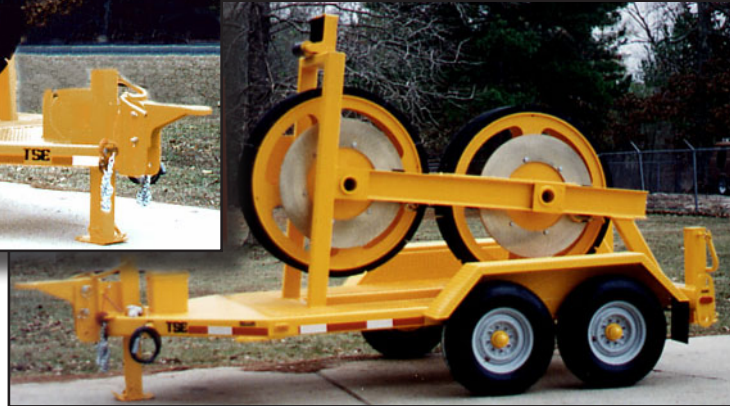


BULLWHEEL TENSIONER

SPECIFICATIONS
T50/42 BW

Continuous rated tension	2268 daN (5000 lbs)
Linespeed	0-6 km/h (0-4 mph)
Bullwheel diameter	1066 mm (42")
Maximum conductor diameter	35 mm (1.39")

T50/48 BW

Continuous rated tension	2268 daN (5000 lbs)
Linespeed	0-6 km/h (0-4 mph)
Bullwheel diameter	1220 mm (48")
Maximum conductor diameter	35 mm (1.39")
GVWR	4830 kg (10,650 lbs)

STANDARD EQUIPMENT

Smooth tensioning of conductors
 Hydraulic disc brakes, equal retarding to bullwheels
 Replaceable synthetic lining segments
 Tail fairlead with 3 rubber lined rollers
 Tandem axle with leaf spring suspension
 One front and two rear manual jacks
 Adjustable pintle hitch tow eye, safety chains
 Highway lighting

OPTIONS

Increased capacity of 3175 daN (7000 lbs) continuous tension
 Two bullwheel modules for two bundle
 Tilted bullwheels for T2 conductor
 4 groove lining segments for 47 mm (1.875") diameter

**OUR PEOPLE CARE ...
OUR EQUIPMENT IS THE PROOF**

TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE