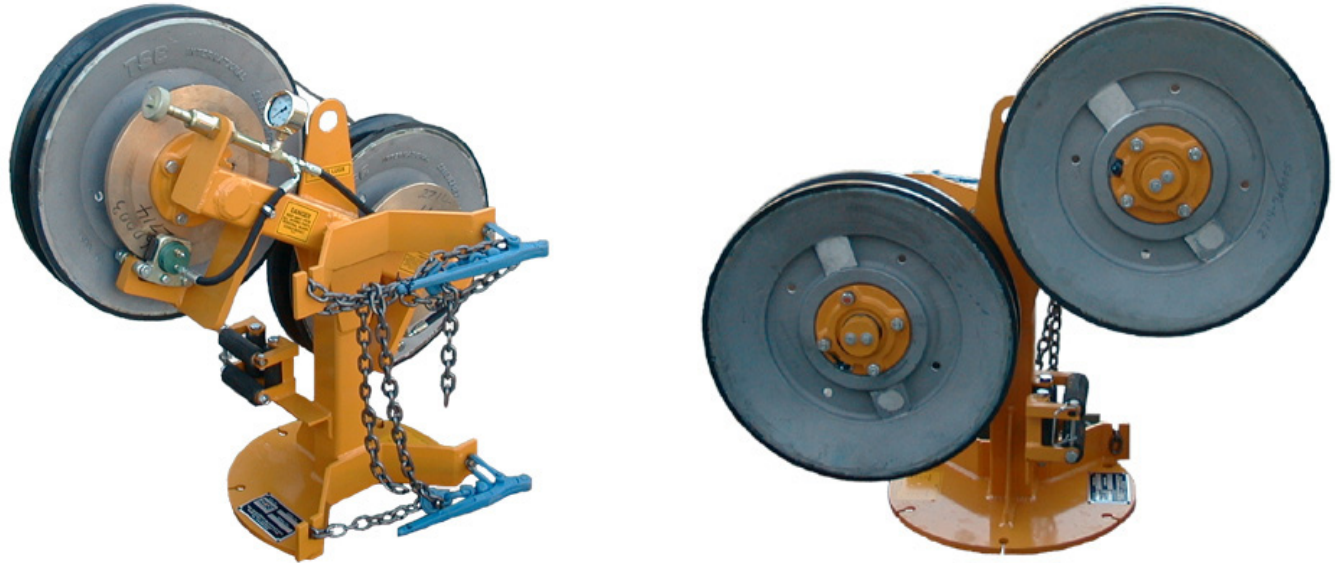


TENSIONER MODULES


The 3505 tensioner module is designed to provide higher conductor stringing tension than possible from braked reel stands. It can be pole mounted, truck or trailer base plate mounted and is to be used in conjunction with a suitable conductor reel let-off stand.

The dual 20" (508 mm) single "V" groove bullwheels are lined with moulded neoprene. The groove will accommodate conductors up to 40 Penguin. Tension brakes on each bullwheel are 10" (254 mm) diameter discs with fine control hydraulic calipers. Adjustment of tension is by means of a simple hand control.

SPECIFICATIONS & PERFORMANCE

Continuous Rated Tension	1000 lbs (454 kg) @ 3 mph (4.83 km/h)
Intermittent Rated Tension	1500 lbs (680 kg)
Weight	250 lbs (113 kg)
Length	40" (1010 mm)
Width	16" (410 mm)
Height	36" (910 mm)
Input Fairlead	Standard
Mounting Chain & Tighteners	Standard

**OUR PEOPLE CARE ...
OUR EQUIPMENT IS THE PROOF**

TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE