

## HYDRAULIC TENSIONER



Line Surge and Galloping are eliminated by this unique hydraulic tensioning reel carrier. The system is self contained and provides smooth accurate control of the conductor tension. Ideal for use where fine control of the conductor is required or where shock loads must be avoided during fibre optic cable or special installation. An excellent Tensioner for use with a Timberland Poleboss™.

### SPECIFICATIONS


Reel shaft diameter	66 mm (2 5/8")
Maximum reel diameter	1830 mm (72")
Maximum reel width	1117 mm (44")
Maximum reel weight	2040 kg (4500 lbs)
Maximum torque	229 daN-m (20,000 in-lbs)
Length (Approx.)	3150 mm (124")
Width (Approx.)	2032 mm (80")
Height (Approx.)	1625 mm (64")
Weight (Approx.)	907 kg (2000 lbs)

### STANDARD EQUIPMENT

Spring applied / hydraulic released drive line brake  
 Single axle with electric brakes  
 Highway lighting  
 7 kW (9 H.P.) gasoline engine for pullback capability

### OPTIONS

Skid mount reel stand

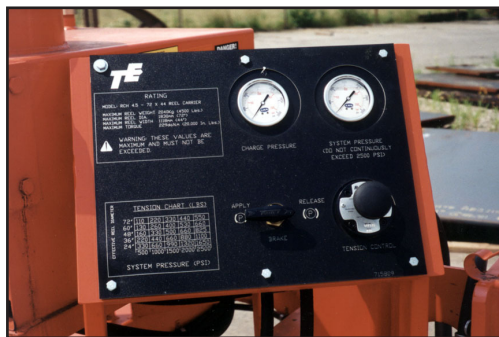

**OUR PEOPLE CARE ...  
OUR EQUIPMENT IS THE PROOF**

## TENSION STRINGING EQUIPMENT & ACCESSORIES CATALOGUE